

# **User Manual**


**SH104M** 

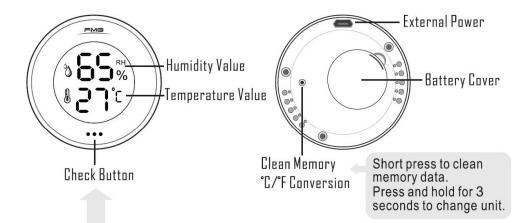

- →Press and hold ••• , MAX blinks, display the max temperature and humidity records.
- →Short press•••, MIN blinks, display the min temperature and humidity records.
- →Short press •••, AVG blinks, display the average temperature records of last hour.
- →Short press ••• again to check the hourly average temperature records for last 48 hours.
- →If there is no any operation on ••• button for 10 seconds, the screen returns to normal display. Or press and hold ••• button to return to normal display.

## Negative Clip





There are Positive Clip and Negative Clip in the battery compartment. Let the Positive Clip contact with battery "+", and Negative Clip contact with battery "-". Do not place both of the Positive Clip and Negative Clip under the battery to touch "-".

## **Temperature & Humidity Recorder**

Measure and record temperature and humidity. Be suitable for transportation, medicine & food production and storage. Such as, wine cooler, cigar humidor, moisture-proof boxes and other equipments which need monitor and record the temperature and humidity data.













### Feature and specification

- ※ Min & Max memory check
- \* Blue backlight
- ★ Memory clean and °C/ °F display conversion
- X Check the hourly average temperature for last 48 hours
- $\times$  Temperature measuring range: 32°F~140°F (0°C-60°C)
- ★ Humidity measuring range: 10%~95%RH
- $\times$  Accuracy :  $\pm 2^{\circ}$ F ( $\pm 1^{\circ}$ C):  $\pm 3^{\circ}$ RH (30%~80%RH).  $\pm 5^{\circ}$ RH for beyond 30%~80%RH
- X Panel Mount and Magneticsm Attraction are compatible
- Product Size: D2.36\*H0.63 inches (D60\*H16 mm)
- ※ Product Tail Diameter: 2.27 inches (57.7 mm)
- Mount Hole Diameter: 2.27 inches ~ 2.36 inches (57.70 mm ~ 60.00 mm)

#### Shenzhen Flamingo Technology Co., Ltd.

sales@fmg-tech.com







